





## Large Trailer Bias Ply

Duro has earned a reputation for having the best quality bias-ply trailer tires in the market. That's why they're the O.E. tire on many popular trailers and campers. Sizes run from small utility trailers up to large RV campers, Duro tires are sure to fit any application and budget. We also back up our claims with a 1-year 100% replacement, no questions asked, warranty.



### HF502 Trailer Tire

Modern tread design to maximize traction under all conditions. Quiet operation and seamless trailing qualities. Exceeds DOT regulations for durability.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
175/80D13 (B78-13)	HF502	4	24	7	1100	35	4.5
175/80D13 (B78-13)	HF502	6	24	7	1360	50	4.5
185/80D13 (C78-13)	HF502	8	25.1	7.7	1660	65	4.5
195/75D14 (E78-14)	HF502	4	26	7.7	1300	35	6
195/75D14 (E78-14)	HF502	6	26	7.7	1600	50	6
205/75D14 (F78-14)	HF502	4	26.5	7.9	1430	35	6
205/75D14 (F78-14)	HF502	6	26.5	7.9	1760	50	6
215/75D14 (G78-14)	HF502	6	27.1	8.4	1870	50	6
205/75D15 (F78-15)	HF502	6	27.3	7.8	1820	65	5
225/75D15 (H78-15)	HF502	6	28.3	8.6	2250	50	6
225/75D15 (H78-15)	HF502	8	28.3	8.6	2620	70	6

## Light Truck Bias Ply

Our Bias Light Truck tires use modern rubber compounds, tread designs and the highest thread count nylon plies ; we take bias tire technology seriously. Our bias light truck tires last longer and outperform many radials on the market. We also back up our claims with a 1-year 100% replacement, no questions asked, warranty.



### DI6003 Light Truck Tire

Wide surface area for stability and load capacity with deep grooves for comfort and traction.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
7.00-15	DI6003	10	29.8	7.8	2381	71	5.5
7.00-16	DI6003	12	31	7.8	2712	82	5.5
7.50-16	DI6003	14	32	8.2	3329	94	6
8.25-16	DI6003	14	34.2	9.6	3770	82	6.5



### DI6000 Light Truck Tire

Tread designed for maximum traction with deep lugs. Excellent for all road conditions and low traction applications.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
7.00-16	DI6000	12	31.2	7.8	2712	82	5.5
7.50-16	DI6000	14	32.4	8.2	3329	94	6
8.25-16	DI6000	14	34.4	9.6	3770	82	6.5



# Trailer Radial

## DS2100 Radial Trailer Tire




DS2100

With expanding capabilities, Duro Tire has recently developed an all new RADIAL tire for the specialty trailer market. Using cutting-edge technology for compound and tread design; this new tire will provide years of reliable and economical service.

Created using the highest quality synthetic rubber and steel belts for high tensile strength and designed with large shoulder grooves for water evacuation; these tires offer exceptional safety in any condition.

Ten different sizes and ratings were created to meet the most popular demand in the trailer industry.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
ST175/80R13	DS2100	6	24.4	7.1	1360	50	4.5
* ST185/80R13	DS2100	6	25.1	7.2	1480	50	5
ST205/75R14	DS2100	6	26.6	8.1	1760	50	6
ST215/75R14	DS2100	6	27.1	8.6	1870	50	6
ST205/75R15	DS2100	6	27.6	8.1	1820	50	5
ST225/75R15	DS2100	6	28.8	8.9	2150	50	6
ST225/75R15	DS2100	8	28.8	8.9	2620	70	6
ST235/80R16	DS2100	10	30.8	9.3	3520	80	6.5
* ST235/85R16	DS2100	10	31.7	9.3	3640	80	6.5
* ST235/85R16	DS2100	12	31.7	9.3	3960	95	6.5



# Light Truck Radial

## DL6000 "Onvoy" Radial Light Truck



DL6000 Onvoy

Created using the highest quality synthetic rubber and steel belts for high tensile strength and designed with large shoulder grooves for water evacuation; these tires offer exceptional safety in any condition.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
LT235/75R15	DL6000	6	28.9	9.3	1985	50	6.5
LT225/75R16	DL6000	10	29.3	8.8	2680	80	6
LT245/75R16	DL6000	10	30.5	9.8	3042	80	7
LT215/85R16	DL6000	10	30.4	8.5	2680	80	6
LT235/85R16	DL6000	10	31.7	9.3	3040	80	6.5
* LT265/75R16	DL6000	10	31.7	10.5	3415	80	7.5

\* Coming Late 2007



# Specialty Trailer Bias Ply



DI5007

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
215/60-8	DI5007	4	18.1	7.9	665	30	6.5
205/50-10	DI5007	4	18.1	9	770	35	7

### DI5007 Low Profile Trailer Tire

Quiet operation and seamless trailing qualities. Exceeds DOT regulations for durability.



HF219

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
6.00-9 T/T	HF219	6	21.6	7.2	1120	60	4
6.00-9 T/T	HF219	8	21.8	7.2	1375	85	4
6.00-9 T/T	HF219	10	22	7.2	1510	100	4
6.50-10 T/T	HF219	10	23.6	7.6	1605	100	5
6.50-10 T/L	HF219	10	23.6	7.6	1605	100	5

### HF219 Highway Tire

Quiet operation and seamless trailing qualities. Exceeds DOT regulations for durability.



HF269

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
4.00-8 T/T	HF269	6	16.6	4.4	748	60	2.5
5.00-8 T/T	HF269	6	18.6	5.4	1045	85	3
5.00-8 T/T	HF269	8	18	5.4	1155	100	3
5.00-8 T/T	HF269	10	18.4	5.5	1230	120	3
6.00-9 T/T	HF269	6	21	6.6	1210	65	4

### HF269 Traller Tire

Good for construction sites and low traction applications. Solid center strip provides smooth on-road performance with shoulder lugs for loose conditions

## Mobile Home Bias Ply



HF501

### HF501 Mobile Home Tire

Duro mobile home size tires are built with the same high quality construction as our other highway tires. Duro doesn't make the cheap quality tires you see on a lot of mobile homes. Instead, our mobile home LT rated tires are D.O.T. approved and are good for many thousands of miles of service. Mobile home tire recyclers will love Duro tires for their long life and high value. There are a lot of utility and equipment trailers using mobile home tires or expensive LPT tires. Now these trailer companies have a better choice.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
7-14.5	HF501	8	26.6	7.3	1870	70	6
7-14.5	HF501	10	26.6	7.3	2090	85	6
8-14.5	HF501	8	27.8	8	2270	70	6
8-14.5	HF501	10	27.9	8	2540	85	6
8-14.5	HF501	12	28	8	2790	100	6



## Small Trailer Bias Ply

### HF232 Trailer Tire

Quiet operation and seamless trailing qualities. Exceeds DOT regulations for durability.



HF232

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
570-8 HF232	HF232	4	18.5	4.9	715	50	3.75
570-8 HF232	HF232	6	18.5	4.9	910	75	3.75
16.5X650-8	HF232	4	16.5	6.6	620	45	5.25
16.5X650-8	HF232	6	16.5	6.6	795	70	5.25
18.5X850-8	HF232	4	18	8.4	770	35	7
18.5X850-8	HF232	6	18.2	8.5	940	50	7
20.5X800-10	HF232	4	20.5	7.9	905	35	6
20.5X800-10	HF232	6	20.5	8	1105	50	6
20.5X800-10	HF232	8	20.5	8	1330	70	6
20.5X800-10	HF232	10	20.5	8	1535	90	6
480-12	HF232	4	20.6	4.9	780	60	4
480-12	HF232	6	20.5	4.9	990	90	4
530-12	HF232	4	21.4	5.6	840	55	4
530-12	HF232	6	21.4	5.5	1045	80	4



HF215

### HF215 Trailer Tire

Quiet operation and seamless trailing qualities. Exceeds DOT regulations for durability.

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
480/400-8	HF215	4	16.7	4.9	590	60	3.75
480/400-8	HF215	6	16.7	4.9	745	90	3.75

## Light Truck Bias Ply

### HF506 Light Truck Tire

Deep treads for long service life and a tread designed for quiet operation. These tires are an excellent value.



HF506

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
7.50-16	HF506	10	32.3	9.5	2780	75	6
7.50-16	HF506	12	32.4	9.6	3060	90	6
8.75-16.5	HF506	10	30.2	9.4	2680	75	6.75
8.75-16.5	HF506	12	30.4	9.4	2980	90	6.75
9.50-16.5	HF506	10	31.2	9.8	3170	75	6.75
9.50-16.5	HF506	12	31.2	10	3525	90	6.75


### HF504 Light Truck Tire

Deep treads for long service life and a tread designed for quiet operation. These tires are an excellent value.



HF504

Size	Tread	P.R.	O.D. Inches	S.W. Inches	Load LBS	P.S.I.	Rim Width Inches
7.00-15	HF504	6	29.5	7.9	1720	60	6
7.00-15	HF504	8	29.6	7.9	2040	75	6
7.00-15	HF504	10	29.6	7.9	2320	75	6
7.50-16	HF504	8	31.6	9.4	2440	90	6
7.50-16	HF504	12	32.2	9.6	3060	105	6
8.75-16.5	HF504	8	29.6	8.8	2350	90	6.75
9.50-16.5	HF504	8	30.3	9.5	2780	90	6.75

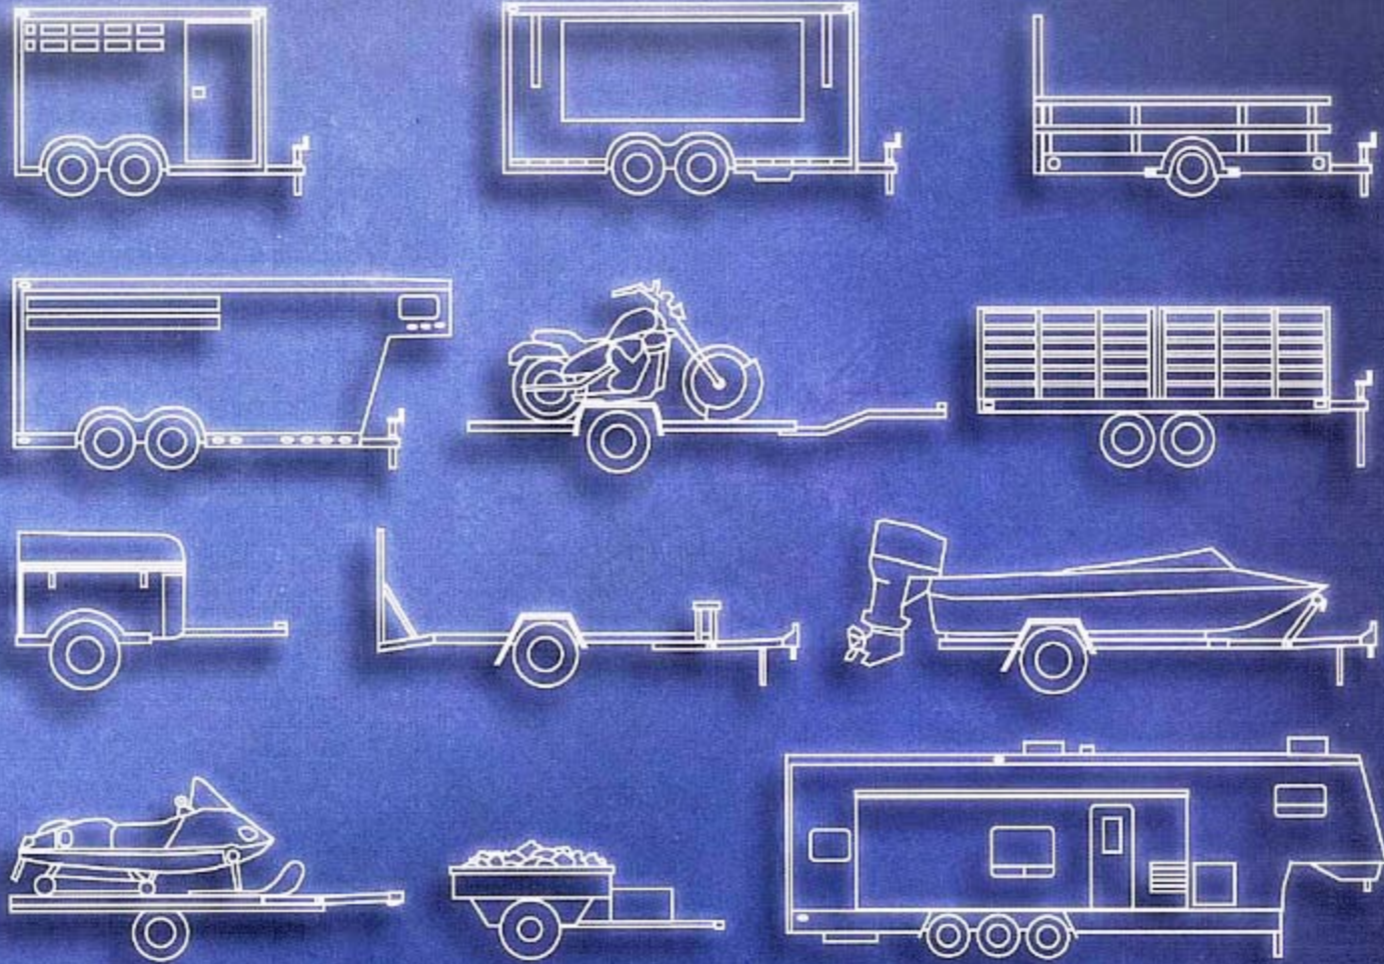

**Duro Tire & Wheel**  
 14290 Lochridge Blvd  
 Covington, GA 30014

Toll Free: 866-788-2060  
 Phone: 770-788-2060  
 Fax: 770-788-2099

[www.durotire.com](http://www.durotire.com)  
[service@durotire.com](mailto:service@durotire.com)

HWA FONG RUBBER IND. CO., LTD

300 Chung-Shan Rd., Sec. 2

Hsui-Tsun Hsiang, Chang-Hua Hsien, Taiwan

Phone: 886-4-8520111

Fax: 886-4-8526833

[www.duro.com](http://www.duro.com)

[durotire@durotire.com](mailto:durotire@durotire.com)

HWA FONG RUBBER (CHINA) CO., LTD

No. 1, Cheng Jiang Road

Economic Development Area

Wuzhenhu, Jiangsu, China

Phone: 86-512-52657067

Fax: 86-512-52657067

[www.duro.com](http://www.duro.com)

HWA FONG RUBBER (SUZHOU) CO., LTD

No. 1, Cheng Jiang Road

Economic Development Area

Wuzhenhu, Jiangsu, China

Phone: 86-512-52657067

Fax: 86-512-52657067

[www.duro.com](http://www.duro.com)